

PARTS & INSTALLATION INSTRUCTIONS

MEYER V - 68 QUIK LIFT®


HOSE REPLACEMENT KIT

08205

PART LIST

PART NO.	QTY.	DESCRIPTION
08205	1	V-68 Hose Replacement Kit
22420	2	• Hose 1/4 x 33" M-6 x Flat Face Seal / Adapter
15595	2	•• O-ring Kit Hose End and Adapter
-----	2	••• O-Ring M-6 Hose End /Adapter
-----	1	••• O-Ring Adapter Flat Face
22418	2	• Hose 3/8 x 33" M-6 x Flat Face Seal / Adapter
15595	2	•• O-ring Kit Hose End and Adapter
-----	2	••• O-Ring M-6 Hose End /Adapter
-----	1	••• O-Ring Adapter Flat Face

Parts indented are included in the carton, bag or assembly under which they are indented.

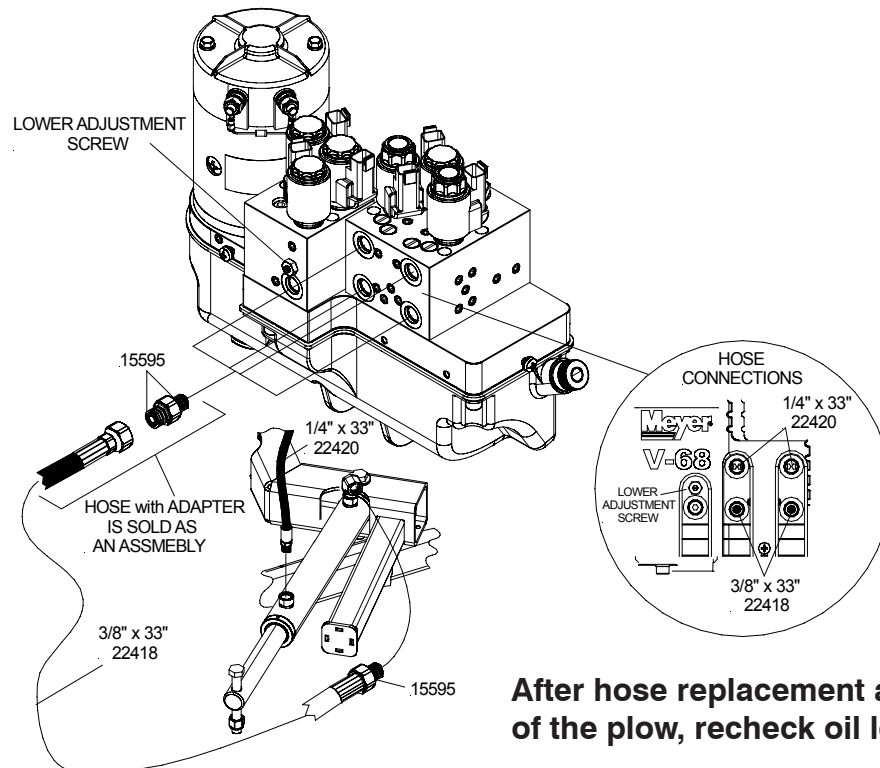

After hose replacement and cycling of the plow, recheck oil level.

Instructions: Remove old hoses and return to factory for warranty credit. Install adapters to the valve block first. Torque adapters to 20 ft. lbs.. Assemble hoses to the ram, 1/4" hose to the rod end and 3/8" hose to the base end per illustration. Note: Prior to hose installation, re-align both 90 degree elbows. Rotate elbows about 45 degrees outward from the ram axis and retighten lock nut. This helps to position hoses away from moving parts. Attached the other end of hoses to valve assembly. Thread hose face seal fittings onto the adapters hand tight. Then tighten locking nut another 30 to 45 degrees of rotation.

Meyer Products LLC reserves the right, under its continuing product improvement program, to change construction or design details, specifications and prices without notice or without incurring any obligation.

Meyer Products LLC.
18513 Euclid Ave. • Cleveland, Ohio 44112-1084
Phone 486-1313 (Area Code 216)
www.meyerproducts.com • email info@meyerproducts.com



Meyer Products LLC.
6 Angell Lane • Damariscotta, ME 04543-4507
Phone 563-2227 (Area Code 207)
www.meyerproducts.com • email info@meyerproducts.com