

# Installation Instructions

## 8891040 Series LED LIGHTBAR



### Specifications

24 High-power LEDs  
2 Amps @ 12V  
24W  
11" x 6-1/2" 2-1/4"

### Wiring Designation

Red: +VDC  
Black: Ground  
Yellow: Signal



Flash Pattern  
Selector

Power On/Off

| Flash Pattern | Description                                  |
|---------------|--|
| 1             | Rotating (CW/CCW)                            |
| 2             | Burst, Fade In-Out/Solid, Fade In-Out        |
| 3             | Random                                       |
| 4             | Burst, Alternating (Side to Side)            |
| 5             | Burst, Alternating, Diagonal (Front to Back) |
| 6             | Burst, Dual Rotating (CW)                    |
| 7             | Burst Hold/Burst Side to Side                |
| 8             | Burst Hold/Single Hold                       |
| 9             | Burst, Single Rotating (CW)                  |
| 10            | Burst, Single Rotating (CCW)                 |

**Note:** Press pattern button 0.5 seconds for next pattern

### **WARNING**


Do not look directly into LEDs while in operation; may cause momentary blindness and/or eye damage

### **WARNING**

It is not recommended to use magnetically mounted warning devices on vehicles in motion. Usage is at sole risk and responsibility of the user.

## READYING THE LIGHTBAR FOR PROPER MOUNTING

### Magnetic Mount Ready

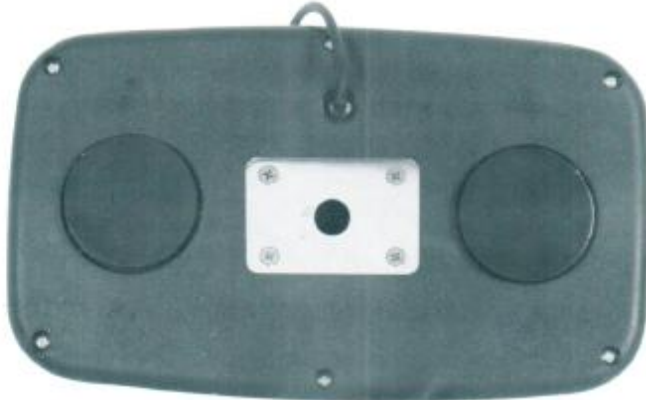

### Bolt-On/Permanent Mount Ready



1. Unscrew magnetic feet by turning counter clockwise.
2. Insert rubber a plug into each magnetic foot mounting hole.
3. Remove (4) screws on center mounting plate. The plate can now be removed.
4. Insert 10mm bolt, head first, into the bottom of the lightbar.
5. Reattach center mounting plate and screws.
6. The lightbar is now ready to be permanently mounted.
7. Place neoprene gasket between the lightbar and mounting surface.
8. Use the included washer, split washer, and nut to finish attaching the lightbar to the mounting surface.

### WARRANTY

Buyers Products Company warranties all LED Strobe and LED Work Light products to the original owner against defects in workmanship and material for a period of five (5) years from the date of purchase unless otherwise specified. Buyers Products must review each warranty claim and reserves the right to offer a refund for the original sale price of the product or replace the defective light. The five (5) year warranty is non transferable, applies to the original owner, and is subject to the following terms and conditions. The warranty will be void in cases of misuse, severe abuse, and failure to properly install the LED Light. Breakage of the lens or housing, corrosion at the plug, wire wicking, voltage spikes, and product failure caused by road chemicals and acid type washes are not warrantable claims. This warranty gives you specific legal rights and you may also have other legal rights that vary from state to state.